



F13 snake LED FLOOD LIGHT

FARO LED FLOODLIGHT delivers precise control offering a choice of narrow and wide beam angle distributions and power supply 100-277VAC / 12-24VDC. Its streamlined design, high performance and maximised visual comfort complements and exterior space, and makes this floodlight the first choice for a host of industry and Marine applications.

FEATURES:



- 5 Year warranty
- Design Life of 50000hrs at L70
- Integral driver standard with 1-10V dimming capabilities, making the F1snake LED FLOODLIGHT suitable for DALI control systems (150-200W)
- Luminaire designed to accept the Marine standard base for Marine authorities, must be factory fitted
- Diecast aluminium body powder coated black
- 4mm toughened glass
- Supplied with 3-core 1.2m fly lead
- CCT 3000K-6000K, CRI > 70
- IP67, IK08 and Ta-35-+ 45 rated

OPTIONS :

- 10W-50W version
- Symmetric 10° and 120° beam distribution
- 270° turnnion bracket arm standard, Ø60 spigot mount versions available upon request
- Option for bird spike

APPLICATIONS:

- General and Marine floodlighting
- Exterior Port and harbour
- Commercial and light industrial areas
- Security and Searching and area lighting

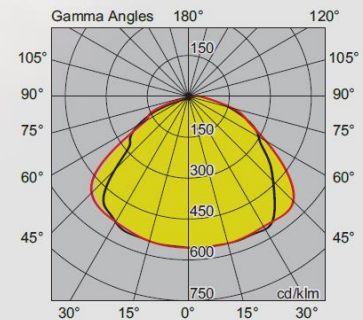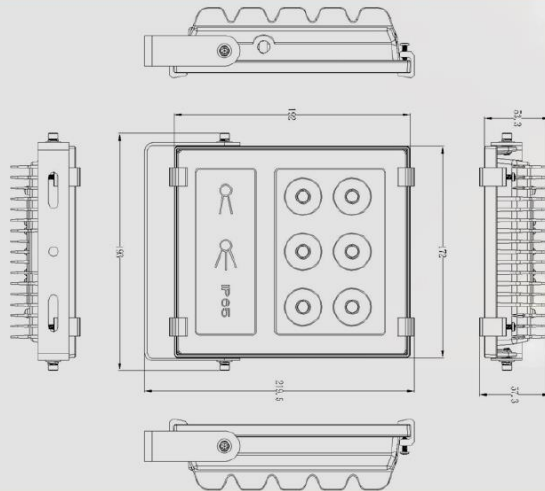

QUANTUM LED FLOODLIGHT 200W
4000K 120° SYMMETRIC BEAM

| PRODUCT CODE | VERSION | WATTAGE | CRI | CCT | DELIVERED LUMENS* | DIM (mm) | MASS |
|--------------|---|---------|-----|-------|-------------------|--------------|-------|
| FARO-10 | 10W,3000K-6000K, 10° / 120° SYMMETRIC BEAM, | 10W | >70 | 4000K | 1400lm | 138x112x45 | 0.6kg |
| FARO-20 | 20W,3000K-6000K, 10° / 120° SYMMETRIC BEAM, | 20W | >70 | 4000K | 2800lm | 138x112x45 | 0.9kg |
| FARO-30 | 30W,3000K-6000K, 10° / 120° SYMMETRIC BEAM, | 30W | >70 | 4000K | 4200lm | 192x172x57.3 | 1.3kg |
| FARO-50 | 60W,3000K-6000K, 10° / 120° SYMMETRIC BEAM, | 50W | >70 | 4000K | 8000lm | 236x202x84.3 | 2.1kg |

* Delivered lumens from luminaire, including thermal, electrical and optic losses.

