

GRANADA



VALUX
iluminación - Lighting

GRANADA

Products information

Decorative urban light pole suitable for open areas.
Body is made extrusion aluminum with die-cast aluminum elements for the base and cover with salt protection treatment to prolong the life of the fixture..
Diffuser is made of high durable PMMA with the utmost protection against all environmental agents.

- Description : Urban pole light

- Die cast aluminum armature.
- Clever thermal desing.
- All external screws are in stainless steel.
- Tempered glass.
- Aluminyum profile body
- Electrostatic powder paint.
- Die cast aluminum lower base.

| | |
|----------------------------------|---------------------------------|
| Led | 60W (other wattage on request) |
| Lumen | 6.900/7.200 Lm |
| Colour Temperature CCT | 3000/6500K |
| Working Life | >50.000 Saat/Hrs |
| Input Voltage | 220-240V-50/60Hz |
| Diffuser | PMMA/PC |
| Colour | All RAL colors |
| Protection Class | IP66 |
| Temperature of Working Condition | -40°C to +60°C |
| Photobiological | Group 1 |
| CRI | >80 |
| Driver | Switching. (Option DALI, 1-10V) |





GRANADA



GRANADA

Photometric Distribution

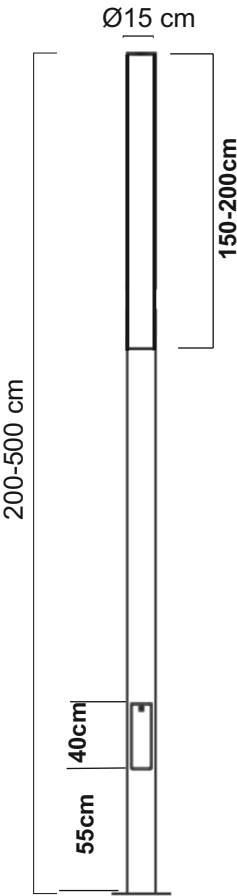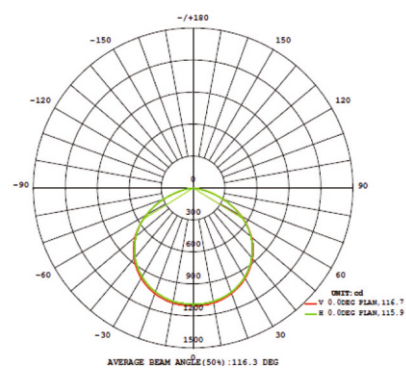

DIMENSIONS AND TECHNICAL DETAILS MIGHT CHANGE WITHOUT PRIOR NOTICE

GRANADA



Order Details

| Référence | POLE | OPTIC | CCT | POWER | (LxWxH) |
|-------------------|--------|------------|----------------|------------|-------------------|
| GR01.186.30.40.40 | | | | | |
| GR01.186.40.40.40 | Ø150mm | OPTIC 360° | 3000K 4000K | 230Vca 40W | Ø150x4000x1000 mm |