



B BULKHEAD

SURFACE-MOUNTED LUMINAIRES

BULKHEAD ceiling light is a well design residential luminaries product suitable for all typ of installation internal and external. Waterproof design excellent for outdoor and wet condition. Fixture can accomodate cct and smart dimming for multiple applications.

Body and diffuser are made of UV protected anti yellowing and shatter proof.

Lead life span is 50,000 hours.

BULKHEAD

BCLA.xx.xx



Mechanical Characteristics

TYPE OF PROTECTION:	IP65
PROTECTION CLASS:	II
IMPACT PROTECTION:	IK08
HOUSING COLOUR:	White
BODY:	PC
COVER:	PC
INSTALLATION:	Surface Mounted





Photometric Data

CRI:	>80
LPW (LM/W):	90LM/W
COLOUR TEMPERATURE:	3000K/4000K/6500K
BEAM ANGLE:	120°
OPERATION TEMPERATURE:	-20°C-50°C

options




Luminous Intensity Distribution Diagram

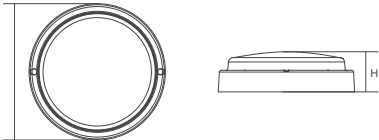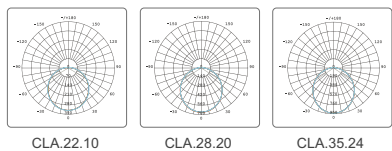

Model	Voltage/Frequency	Power	Number of LED	Luminous Flux	Dimensions Size	Installation Size	Item/Box	Package Size
BCLA.22	200-240V 50HZ	10W	52	900lm	220x65mm	204mm	10pcs	750x240x250mm
BCLA.28	200-240V 50HZ	20W	102	1800lm	280x71mm	263mm	10pcs	810x300x310mm
BCLA.35	200-240V 50HZ	24W	144	2200lm	350x81mm	332mm	10pcs	910x370x380mm



options



BCLB.xx.xx


Mechanical Characteristics

TYPE OF PROTECTION:	IP65
PROTECTION CLASS:	II
IMPACT PROTECTION:	IK08
HOUSING COLOUR:	White
BODY:	PC
COVER:	PC
INSTALLATION:	Surface Mounted

Photometric Data

CRI:	>80
LPW (LM/W):	90LM/W
COLOUR TEMPERATURE:	3000K/4000K/6500K
BEAM ANGLE:	120°
OPERATION TEMPERATURE:	-20°C-50°C

Luminous Intensity Distribution Diagram

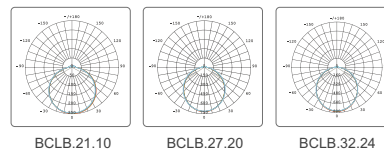

Accessories



Installation
Component

Model	Voltage/Frequency	Power	Number of LED	Luminous Flux	Dimensions Size	Installation Size	Item/Box	Package Size
BCLB.21	100-277V 50/60HZ	10W	84	900lm	210x57mm	140mm	15pcs	1020x230x235mm
BCLB.27	100-277V 50/60HZ	20W	144	1800lm	270x57mm	180mm	15pcs	1020x290x295mm
BCLB.32	100-277V 50/60HZ	24W	225	2100lm	320x57mm	220mm	12pcs	820x340x345mm