

LUXILUM[®]



LINEAR LED LIGHTS MALAGA SERIES

MALAGA - SU6880- Suspended



Office and residential suspended or surface mounted linear light fixture. Made to meet any type of project requirements. Fixture can be installed individual, connected on one line or by using the different accessories to create unique and stylish shapes like square, triangle, hexagonal and other shapes.



product summary:

ring and body : extruded aluminum corrosion resistant

reflector: optional with aluminum reflector.

diffuser: optional double parabolic, single parabolic or opal diffuser

color index: Ra \geq 80

electrical: heat resistant wiring,

led rated life: 50,000Hrs

electrification: UL, CUL, ENEC, IMQ, VDE.



control gear: built in complies with EN61558, EN 61347.

body colors: White, Grey.

wattage/LED power:

23W, 27W, 35W, 49W. other wattage on request

ingress protection: IP40/44

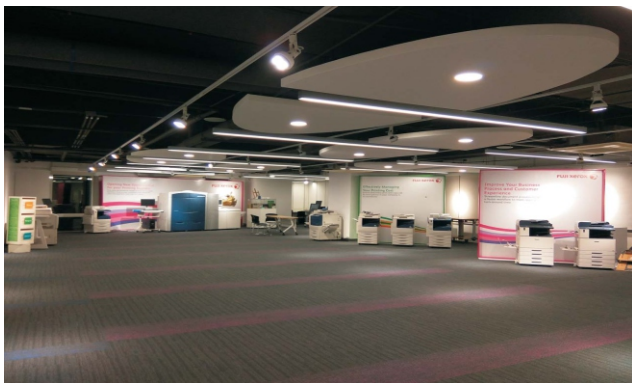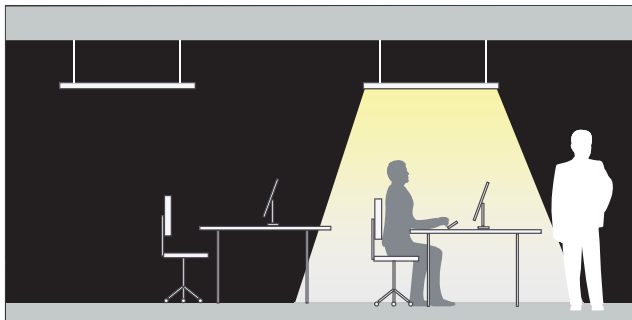

MALAGA - SU6880- Suspended



23W

S233085.x.x.x	23W	LED	3000K	CRI > 85	▲100°	LED1950 Lm
S234085.x.x.x	23W	LED	4000K	CRI > 85	▲100°	LED 2100 Lm



27W

S273085.x.x.x	27W	LED	3000K	CRI > 85	▲100°	LED 2380 Lm
S274085.x.x.x	27W	LED	4000K	CRI > 85	▲100°	LED 2680 Lm



35W

S353085.x.x.x	35W	LED	3000K	CRI > 85	▲100°	LED 2950 lm
S354085.x.x.x	35W	LED	4000K	CRI > 85	▲100°	LED 3100 lm





49W

S493085.x.x.x	49W	LED	3000K	CRI > 85	▲100°	LED 4250 lm
S494085.x.x.x	49W	LED	4000K	CRI > 85	▲100°	LED 4400lm



other wattage and lengths on request.

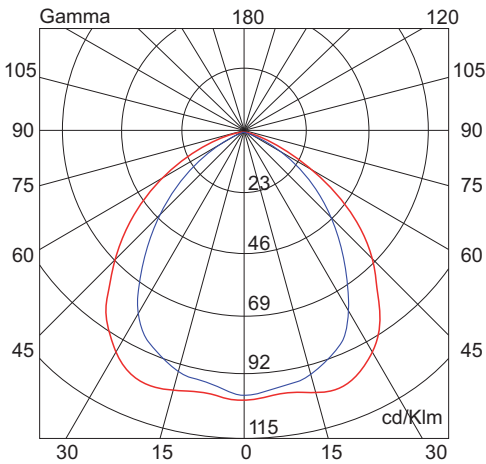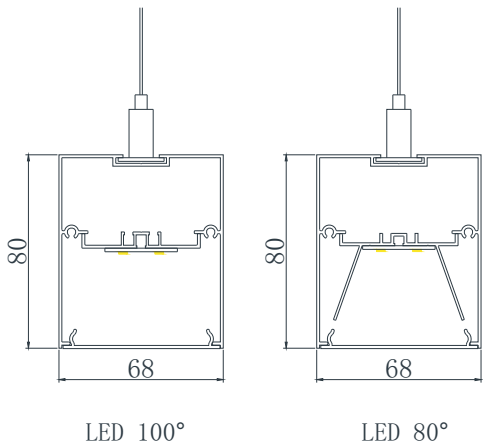


Finish Color
 □ WHITE
 ■ GREY



Electrical
 1-NON DIMMABLE ELECTRONIC DRIVER 220V 50/60Hz.
 2-DIMMABLE DRIVER 1-10V 220V-60Hz.
 3-DALI DRIVER 220V 50-60Hz.

Distribution
 V-DOUBLE PARABOLIC LOUVRE.
 S-SINGLE PARABOLIC LOUVRE.
 O-OPAL DIFFUSER.

Installation Options

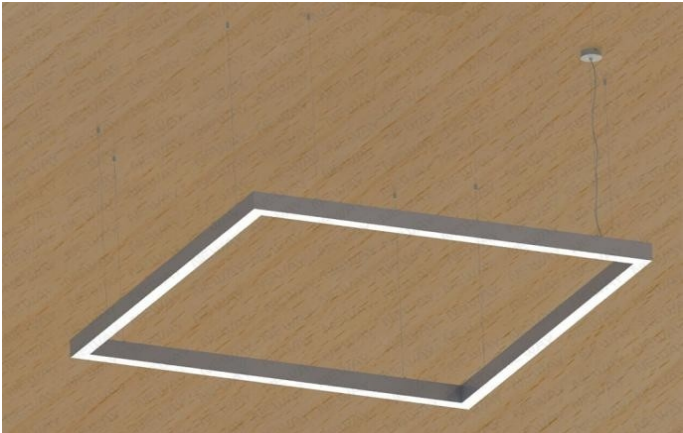

Customized Length on Request

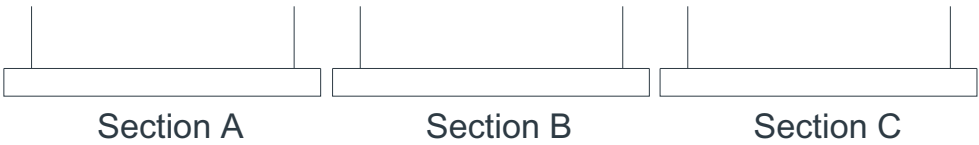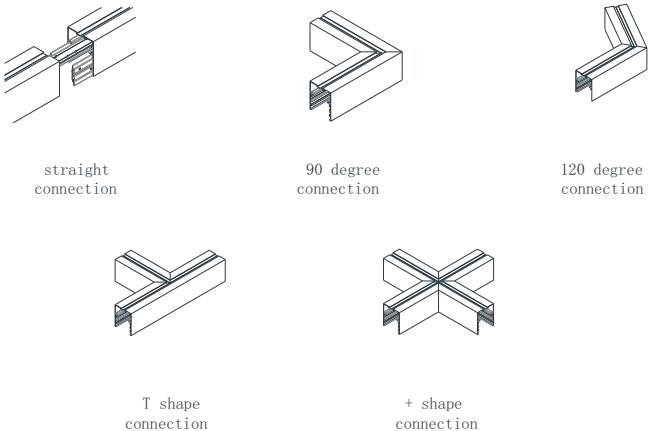

Distribution



S-Single Parabolic



V-Double Parabolic



O-Opal Diffuser





MALAGA - RE6880- Recessed -Slim



Office and residential recessed or surface mounted linear light fixture. Made to meet any type of project requirements. Fixture can be installed individual, connected on one line or by using the different accessories to create unique and stylish shapes like square, triangle, hexagonal and other shapes. Fixture is available with trim and trim-less installations.



product summary:

ring and body : extruded aluminum corrosion resistant

reflector: optional with aluminum reflector.

diffuser: optional double parabolic, single parabolic or opal diffuser

color index: $Ra \geq 80$

electrical: heat resistant wiring,

led rated life: 50,000Hrs

electrification: UL, CUL, ENEC, IMQ, VDE.



control gear: built in complies with EN61558, EN 61347.

body colors: White, Grey.

wattage/LED power:

23W, 27W, 35W, 49W. other wattage on request

ingress protection: IP40/44

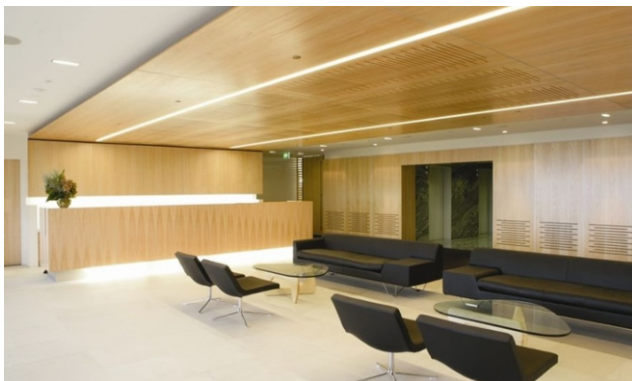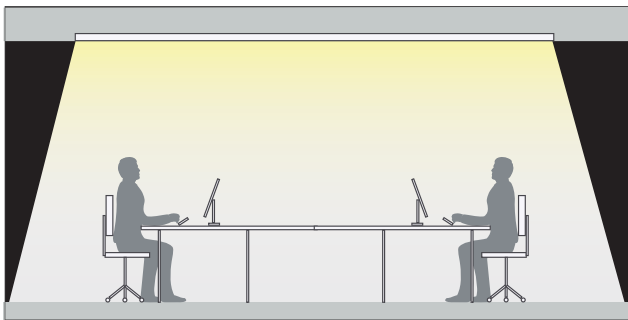

MALAGA - 6880- Recessed-Slim



23W

R1233085.x.x.x	23W	LED	3000K	CRI > 85	▲100°	LED1950 Lm
R1234085.x.x.x	23W	LED	4000K	CRI > 85	▲100°	LED 2100 Lm

L=1.2m 

27W

R1273085.x.x.x	27W	LED	3000K	CRI > 85	▲100°	LED 2380 Lm
R1274085.x.x.x	27W	LED	4000K	CRI > 85	▲100°	LED 2680 Lm

L=1.5m 

35W

R1353085.x.x.x	35W	LED	3000K	CRI > 85	▲100°	LED 2950 lm
R1354085.x.x.x	35W	LED	4000K	CRI > 85	▲100°	LED 3100 lm


L=1.8m 

49W


R1493085.x.x.x		LED	3000K	CRI > 85	▲100°	LED 4250 lm
R1494085.x.x.x	49W	LED	4000K	CRI > 85	▲100°	LED 4400lm

L=2.4m 

For trim-less please add T.
e.g. R1T23085.x.x.x
other wattage and lengths on request.

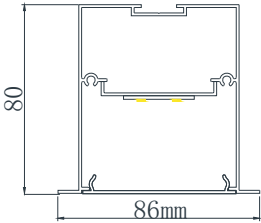

LED 100°




LED 80°


Finish Color
 WHITE
 GREY

Electrical
 1-NON DIMMABLE ELECTRONIC DRIVER 220V 50/60Hz.
 2-DIMMABLE DRIVER 1-10V 220V-60Hz.
 3-DALI DRIVER 220V 50-60Hz.


Distribution
 V-DOUBLE PARABOLIC LOUVRE.
 S-SINGLE PARABOLIC LOUVRE.
 O-OPAL DIFFUSER.

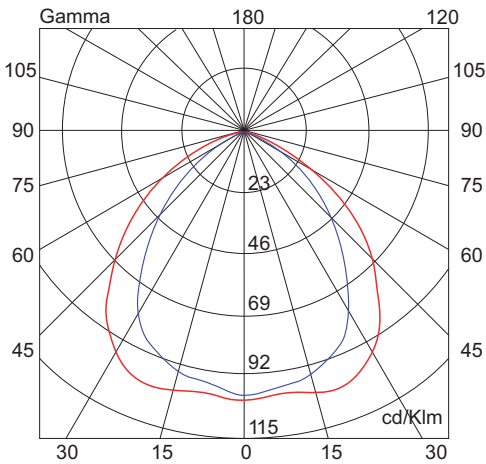

MALAGA - RE6880- Recessed-Slim

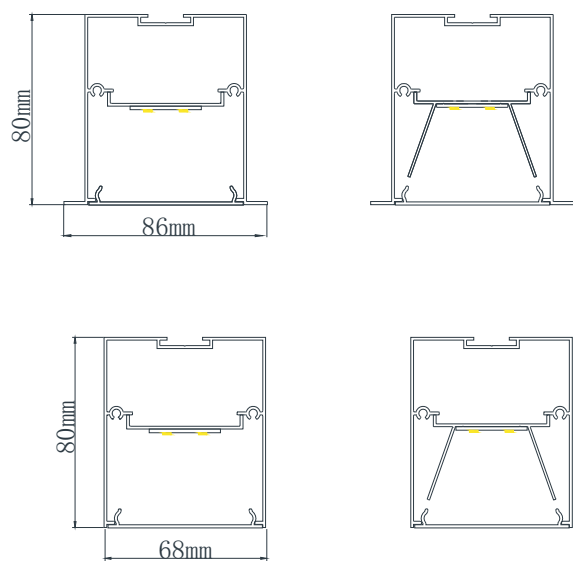


Trim-less

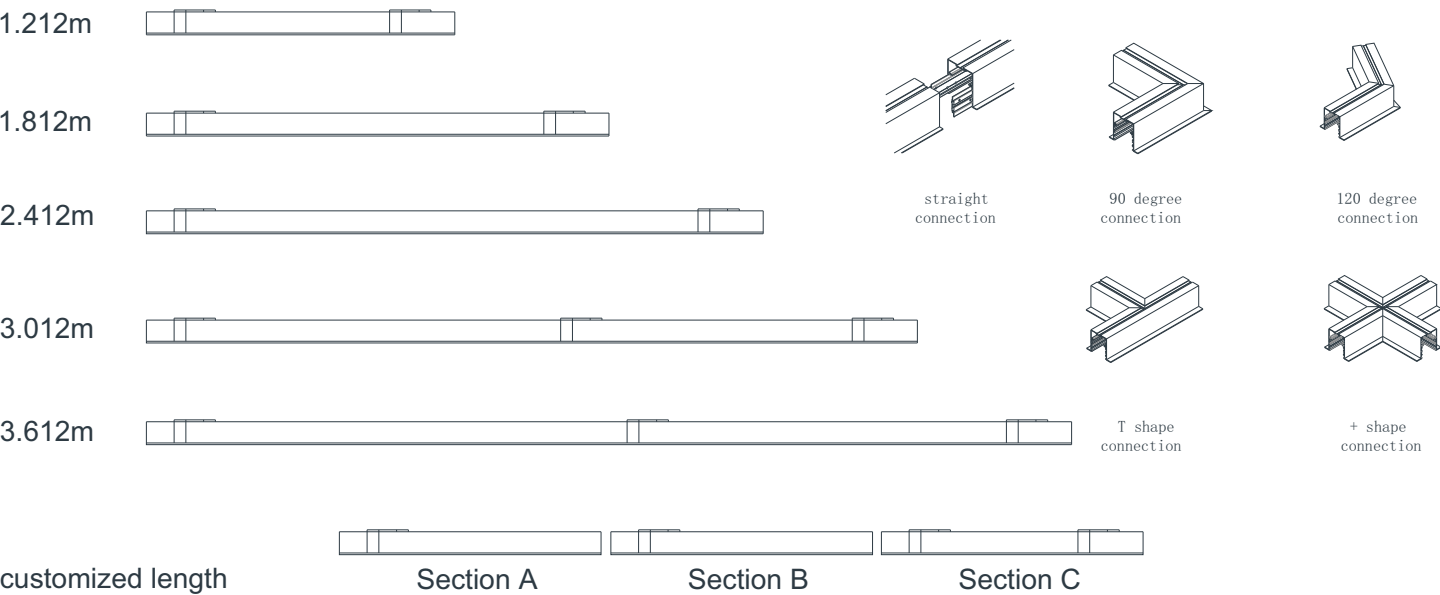


Example for width 86mm

Power	Length	Cut-out
23W	1212mm	1205x72mm
27W	1462mm	1455x72mm
35W	1812mm	1805x72mm
49W	2412mm	2405x72mm



on request assymetrical distribution

MALAGA - RE6880- Recessed-Wide

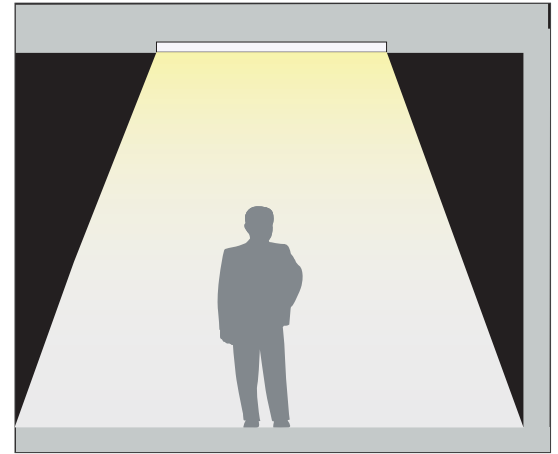

23W-46W

R2233085.x.x.x	23W	LED	3000K	CRI > 85	▲100°	LED 1950 Lm
R2234085.x.x.x	23W	LED	4000K	CRI > 85	▲100°	LED 2100 Lm

L=1.2m



27W-54W

R2273085.x.x.x	27W	LED	3000K	CRI > 85	▲100°	LED 2380 Lm
R2274085.x.x.x	27W	LED	4000K	CRI > 85	▲100°	LED 2680 Lm

L=1.5m



35W-70W

R2353085.x.x.x	35W	LED	3000K	CRI > 85	▲100°	LED 2950 lm
R2354085.x.x.x	35W	LED	4000K	CRI > 85	▲100°	LED 3100 lm

L=1.8m




49W-90W

R2493085.x.x.x		LED	3000K	CRI > 85	▲100°	LED 4250 lm
R2494085.x.x.x	49W	LED	4000K	CRI > 85	▲100°	LED 4400lm


L=2.4m




For trim-less please add T.
e.g. R2T23085.x.x.x
other wattage and lengths on request.

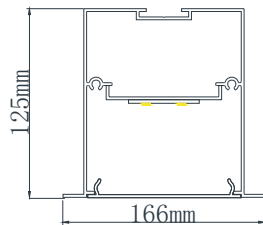

LED 100°



LED 80°


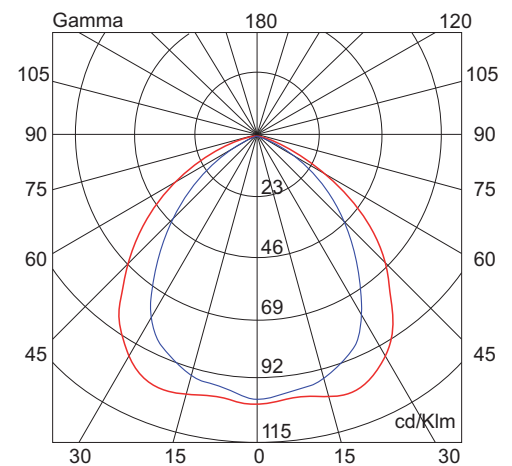


Finish Color
□ WHITE
■ GREY

Electrical
1-NON DIMMABLE ELECTRONIC DRIVER 220V 50/60Hz.
2-DIMMABLE DRIVER 1-10V 220V-60Hz.
3-DALI DRIVER 220V 50-60Hz.


Distribution
V-DOUBLE PARABOLIC LOUVRE.
S-SINGLE PARABOLIC LOUVRE.
O-OPAL DIFFUSER.

MALAGA - Re6880- Recessed-Wide

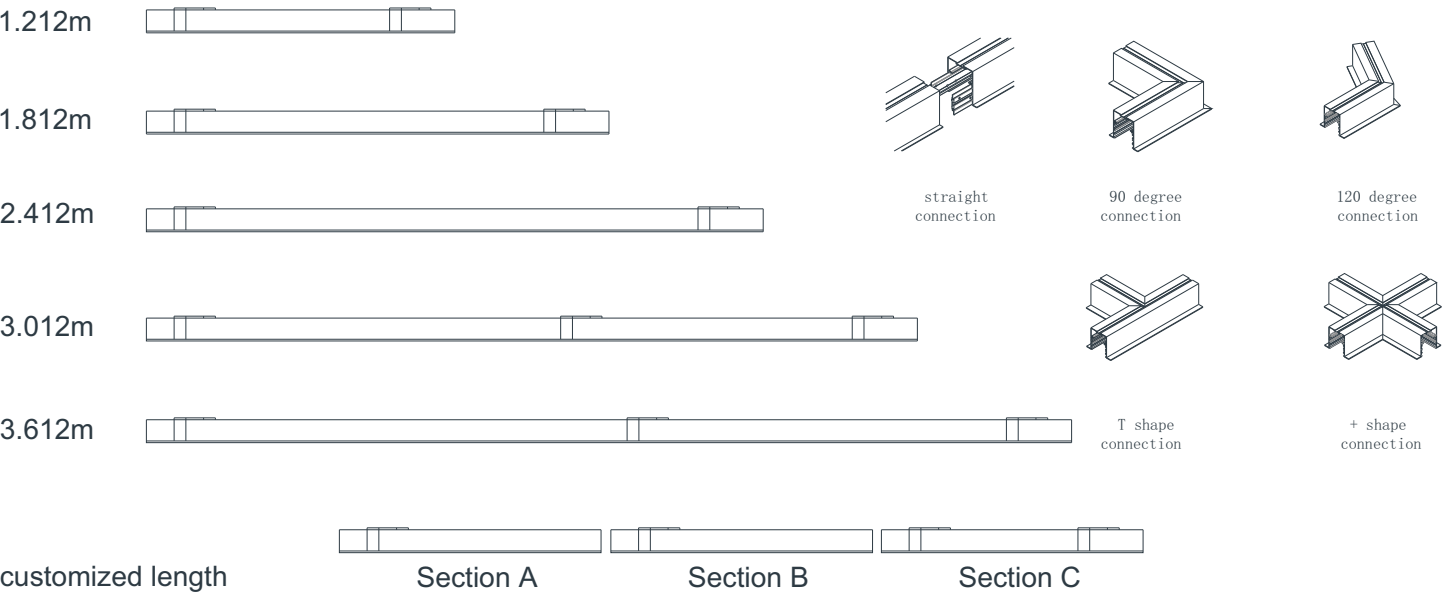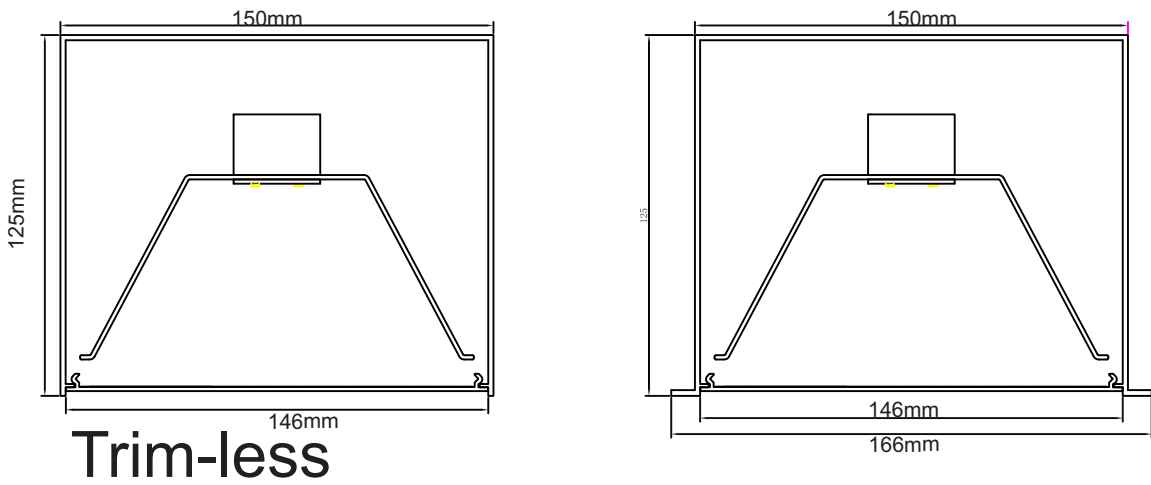

Example for width 86mm

Power	Length	Cut-out
23W	1212m	1205x150mm
27W	1462m	1455x150mm
35W	1812mm	1805x150mm
49W	2412mm	2405x150mm

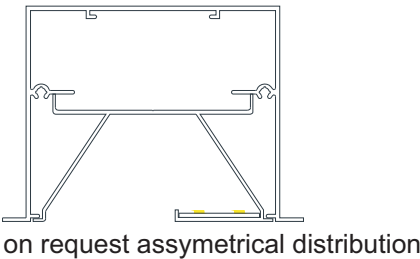





Pictograms



In accordance with EU directives



Degree of protection



Glow wire test



Class I luminaire



Suitable for mounting on normally inflammable surfaces



Direct light



Asymmetric light



Direct and indirect light



Indirect light



Electronic



Dimmable 1-10 v




Dimmable DALI



Available with emergency kit



With LED technology integrated not replaceable

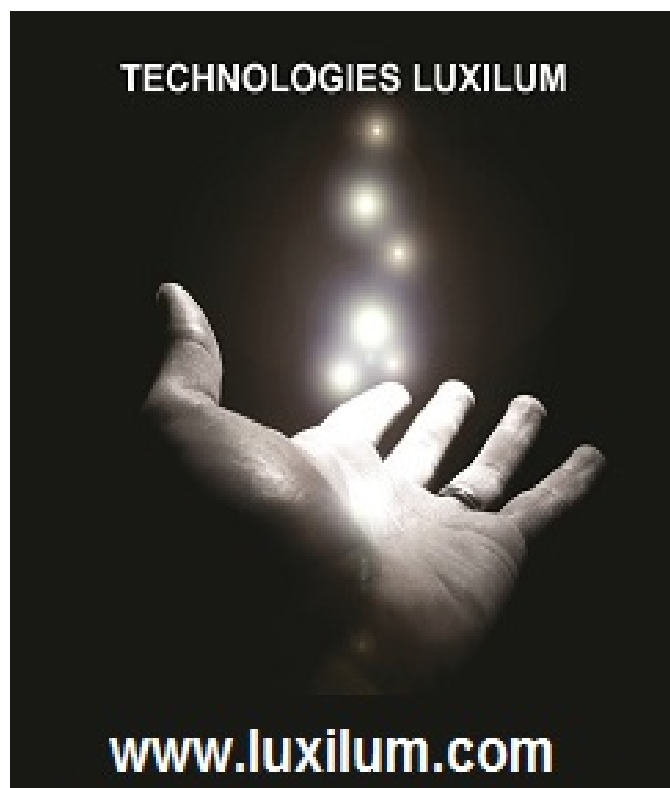

LuxiLum®

Address: Calle Itaroa, 2-2, 31620 Huarte, Navarra, Spain

Province: Navarre

Phone: +34 667 55 11 14

Web: www.luxilum.com

